


# A type floor standing light box



Shop entrance advertising bill board

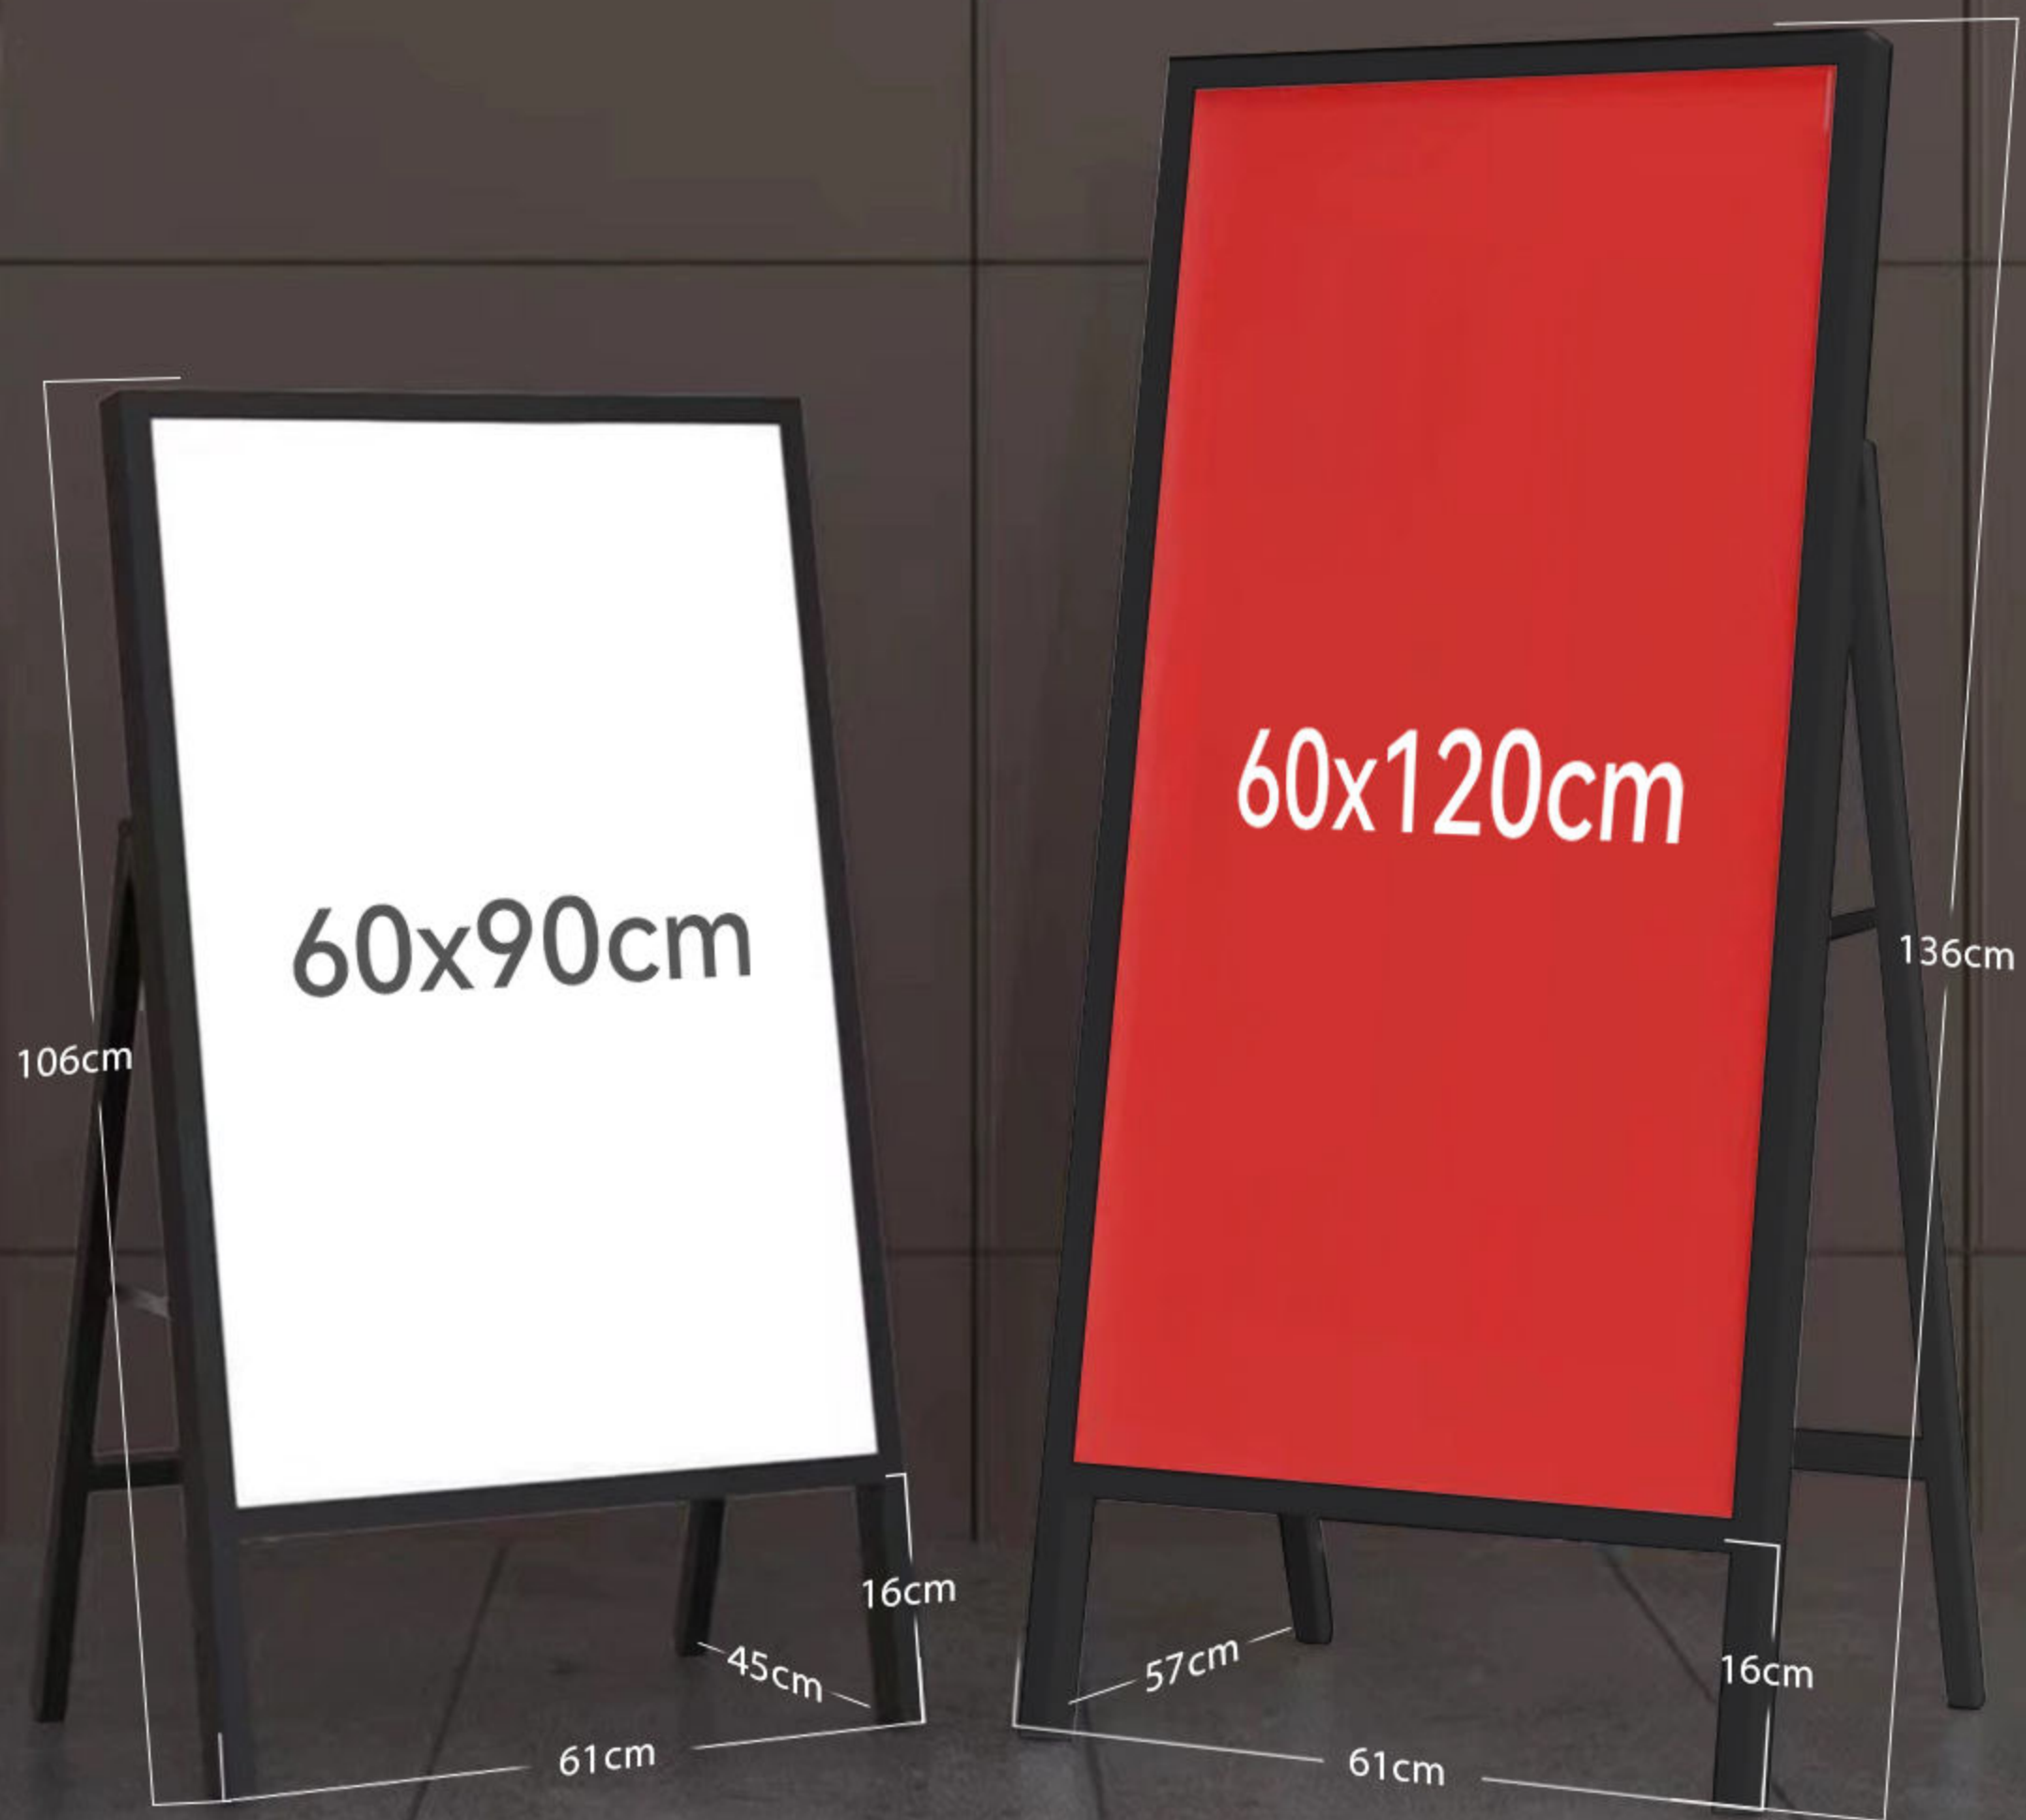


Two sizes available

# Folding design does not take up space



✂ Working capacity 12 hours on a single  
8-hour charge cycle

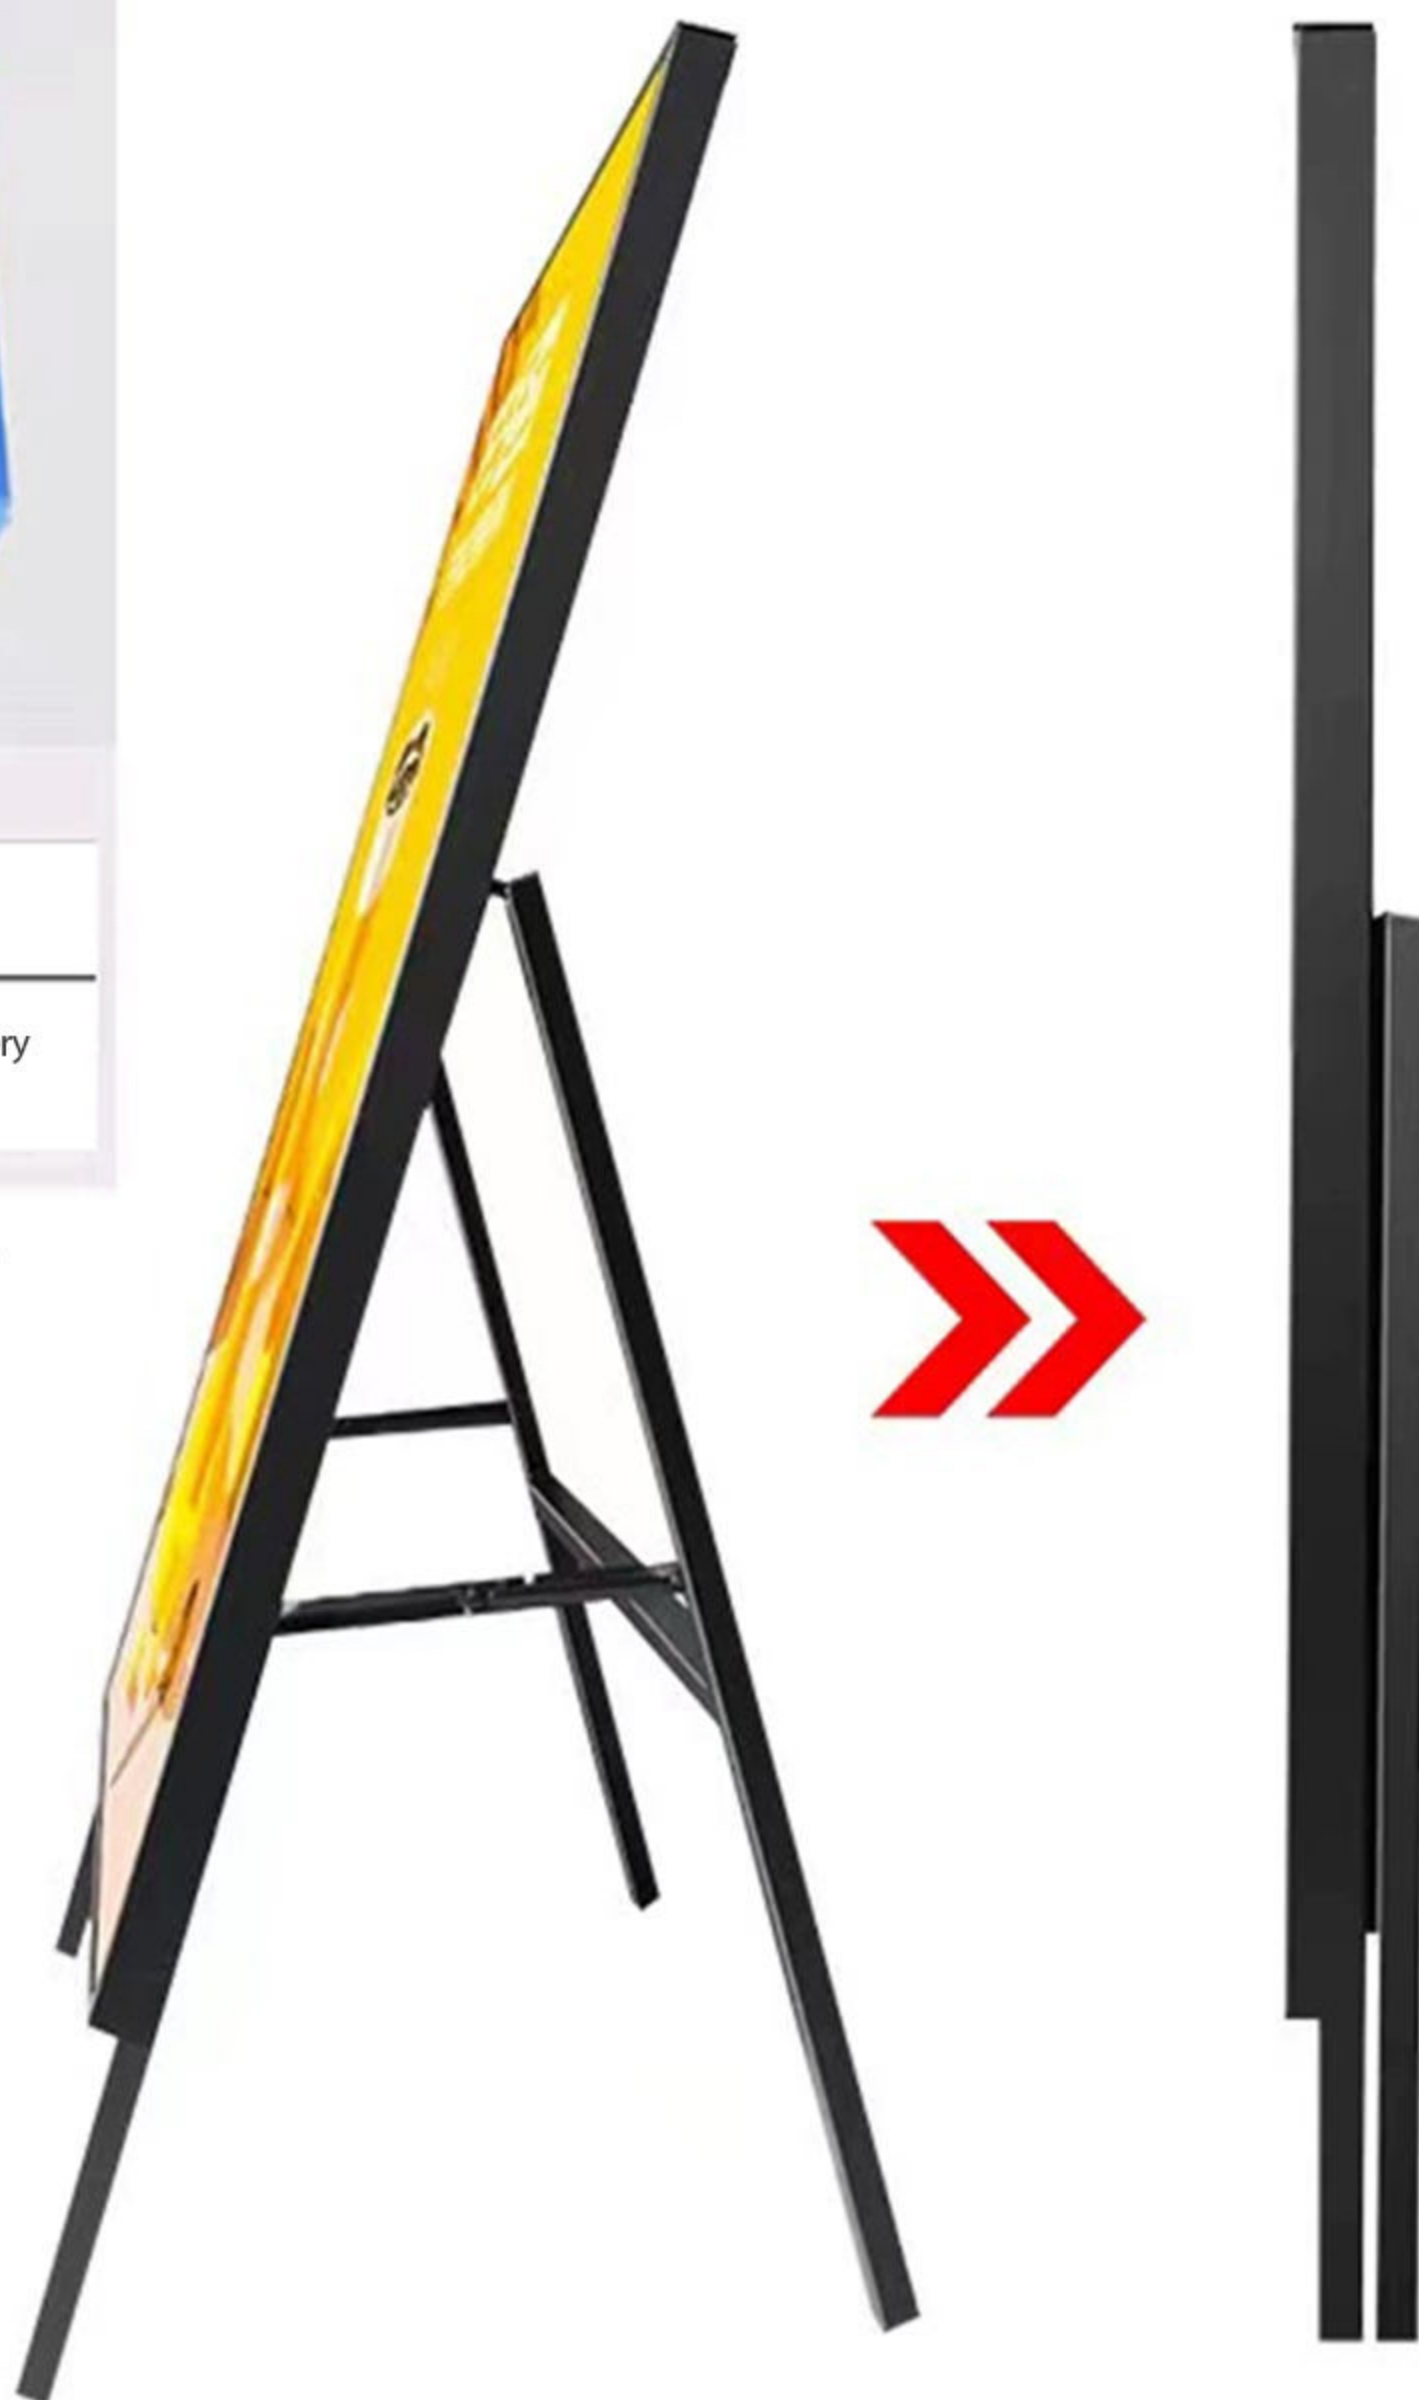

3 seconds quick change poster, insert and push  
Suitable below 6mm KT board / Film material



# Light & Easy to carry

## Suitable for multiple scenarios



**3 seconds quick change poster, insert and push**  
**Suitable below 6mm KT board / Film material**



# Folding hinge design Save space



As a whole not require complex installation and  
improves product stability (independent packaging)



# Product parameters

|                           |                                                                                         |                |
|---------------------------|-----------------------------------------------------------------------------------------|----------------|
|                           |                                                                                         |                |
| Size                      | 600*900*10mm                                                                            | 600*1200*10mm  |
| Panel Material            | Tempered glass                                                                          | Tempered glass |
| Color temperature         | 6000K                                                                                   | 6000K          |
| Illumination              | 7000-8000 Lux                                                                           | 7000-8000 Lux  |
| Power                     | 27W                                                                                     | 34W            |
| Package size              | 1022*664*61mm                                                                           | 1322*664*61mm  |
| Poster size               | 588*894mm                                                                               | 588*1194mm     |
| Two power supplies option | DC charge: DC24V/2A CCC Safety power supply<br>Certified lithium battery: DC24V/8000mah |                |
|                           |                                                                                         |                |

**\*Notice:** Not include poster



# Applications



# Applications



# Applications